



# CARAVAN & TOURING CATALOGUE

17TH & 18TH EDITION  
NEW 18TH EDITION  
ELECTRONIC



**Famatel**.uk


Ingenuity and  
electrical solutions


## Company

We are **specialised manufacturers in the international electrical sector** with more than 30 years of experience developing electrical solutions that provide value to professionals.

### The figures speak for themselves


**+ 30**   
Years of experience

**+ 450**   
Professionals

**4**   
Production hubs

**+ 3.000**   
Order lines per day

**+ 30.000 m<sup>2</sup>**   
Production and logistics facilities

**10**   
Business Subsidiaries

---

**1**

**17<sup>TH</sup> EDITION CARAVAN  
HOOK-UP UNITS**  
p.4

---

**2**

**18<sup>TH</sup> EDITION CARAVAN  
HOOK-UP UNITS**  
p.5

---

**3**

**DIRECT CONNECTION UNITS**  
p.7

---

**4**

**MARINA & CARAVAN  
BOLLARDS**  
p.8

---

**5**

**NEW ELECTRONIC  
INTERLOCKED SOCKETS**  
p.9

---

**6**

**NEW 18<sup>TH</sup> EDITION CARAVAN  
HOOK-UP UNITS**  
p.11

---

**7**

**CUSTOM OUTFLIED PDU**  
p.14

---

**8**

**E-PITCH**  
p.15

---

**9**

**NEW 18<sup>TH</sup> EDITION CARAVAN  
HOOK-UP UNITS WITH SMART  
SYSTEM INTEGRATION**  
p.16

---

**10**

**ACCESSORIES**  
p.18

---

**11**

**SPEED PRO - CATALOGUE**  
p.19

# 17<sup>th</sup> Edition Caravan Hook-up Units

IP54 RATED



Ref. / Item  
**CAVSTK & NEWCAVS**



Ref. / Item  
**CAV1**



Ref. / Item  
**CAV2**



Ref. / Item  
**CAV3**



Ref. / Item  
**CAV4**



Ref. / Item  
**NSICAV1**

## How the Codes Work

ITEM NAME	DESCRIPTION
CAV_	Range Code
_1	Number of Outlets (16A)
CAV_32/_	32A Outlets
_/M	With Meter
_/F	Front Mounted
_/LK	Lockable
_/TT	Through Terminal
_/PH	Photo Cell

## Stake Information

PART CODE	DESCRIPTION
CAVSTK1	17th & 18th Edition Caravan stakes for 1 & 2 Gang & New NEW CAV1 & NEWCAV1 & NEWCAV/C/M:
CAVSTK2	17th Edition Caravan Stakes for 3 & 4 Gang:

## Technical Data

AMP	POLES	TYPE A RCBO 30MA DP	MID APPROVED METERS	PART CODE	STAKE NEEDED
16A	3P	1 x 16A	-	CAV1	CAVSTK1
	3P	1 x 16A	1	CAV1/M	CAVSTK1
	3P	2 x 16A	-	CAV2	CAVSTK1
	3P	2 x 16A	2	CAV2/M	CAVSTK1
	3P	3 x 16A	-	CAV3	CAVSTK2
	3P	3 x 16A	3	CAV3/M	CAVSTK2
	3P	4 x 16A	-	CAV4	CAVSTK2
	3P	4 x 16A	4	CAV4/M	CAVSTK2
32A	3P	1 x 32A	-	CAV132	CAVSTK1
	3P	1 x 32A	1	CAV132/M	CAVSTK1

Add \*/F = Front Mounted | Add \*/LK = Lockable Sockets | Add \*/PH = Photo Cell | Add \*/TT = Through Terminal Set

### Additional Information

- Made In Britain, UKCA;
- Side mounted as standards;
- Optional Side mounting available;
- Available in 16A, 32A;
- Single phase;
- 17th edition regulations compliant;
- Rating of unit as standard IP54;
- Optional IP 65 available;
- Optional MID compliant kWh meter;
- Optional pre-paid meter;
- Optional Smart system Intergration;
- Built-in "RCBO" overload and 30mA fault current protection;
- IP65 weatherproof ABS enclosure;
- Devices access flap;
- Optional galvanised mounting post;
- Optional Bras plates available;
- Optional Loop in and out Terminals;
- Easy to install & maintain;
- IP Rated & UV stabilised;
- Glow wire tested to 650 and 850 deg;
- Operational temp -25 to plus 40;
- Replacment parts for all units available;

### Other configurations available

- 16A to 32A outlets, single phase, three phase or a mix
- RCBOs 16A to 32A single phase, three phase or a mix

The WER Range RCBO from type A & AC Type RCD protection in one. RCBO's (Residual Current Circuit Breaker with Overload Protection) provide residual and overload protection in one neat device. They can detect & respond as for type AC, PLUS pulsating DC components. Ideal for Electric Vehicles, Domestic and Commercial applications.

## 18<sup>th</sup> Edition Caravan Hook-up Units

IP54 RATED



Ref. / Item  
**CAVSTK & NEWCAVS**

Ref. / Item  
**NEWCAV1C**

Ref. / Item  
**NEWCAV1**

Ref. / Item  
**NEWCAV2**

Ref. / Item  
**NEWCAV3**

Ref. / Item  
**NEWCAV4**

### How the Codes Work

ITEM NAME	DESCRIPTION
NEWCAV_	Range Code
_1	Number of Outlets (16A)
NEWCAV_32/_	32A Outlets
_/C	Compact
_/M	With Meter
_/F	Front Mounted
_/LK	Lockable
_/TT	Through Terminal
_/PH	Photo Cell

## 17<sup>th</sup> & 18<sup>th</sup> Edition Caravan Hook-up Units

### Stake Information

PART CODE	DESCRIPTION
NEWCAVS	18th Edition Stake for "NEWCAV". Excluding Items with "C" reference
CAVSTK1	17th Edition Stake for 1 and 2 Gang
CAVSTK2	17th Edition Stake for 3 and 4 Gang

### Technical Data

AMP	POLES	TYPE A RCBO 30MA DP	MID APPROVED METERS	PART CODE	STAKE NEEDED
16A	3P	1 x 16A	-	CAV1	CAVSTK1
	3P	1 x 16A	1	CAV1/M	CAVSTK1
	3P	2 x 16A	-	CAV2	CAVSTK1
	3P	2 x 16A	2	CAV2/M	CAVSTK1
	3P	3 x 16A	-	CAV3	CAVSTK2
	3P	3 x 16A	3	CAV3/M	CAVSTK2
	3P	4 x 16A	-	CAV4	CAVSTK2
	3P	4 x 16A	4	CAV4/M	CAVSTK2
32A	3P	1 x 32A	-	CAV132	CAVSTK1
	3P	1 x 32A	1	CAV132/M	CAVSTK1
16A	3P	1 x 16A	-	NEWCAV1C	CAVSTK1
	3P	1 x 16A	1	NEWCAV1CM	CAVSTK1
32A	3P	1 x 32A	-	NEWCAV132C	CAVSTK1
	3P	1 x 32A	1	NEWCAV132/M	CAVSTK1

Add \*/PH = Photo Cell | Add \*/TT = Through Terminal Set

### Other configurations available

- 16A to 32A outlets, single phase, three phase or a mix
- RCBOs 16A to 32A single phase, three phase or a mix

### Additional Information

- Made In Britain;
- UKCA;
- Available in 16A, 32A;
- Single phase;
- Front mounted;
- 18th edition regulations compliant;
- Rating of unit as standard IP54;
- Optional IP 65 available;
- Optional MID compliant kWh meter;
- Optional pre-paid meter;
- Optional Smart system Intergration;
- Built-in "RCBO" overload and 30mA fault current protection;
- IP65 weatherproof ABS enclosure;
- Devices access flap;
- Optional galvanised mounting post;
- Optional Bras plates available;
- Optional Loop in and out Terminals;
- Easy to install & maintain;
- IP Rated & UV stabilised;
- Glow wire tested to 650 and 850 deg;
- Operational temp -25 to plus 40;
- Replacment parts for all units available;

## Direct Connection Units

Famatel UK direct connection unit offer for 16A, 32A or 63A electrical supplies in single and three phase versions available for direct connection facility to fixed cabins / caravan and holiday homes.

### Key features

- Made In Britain
- UKCA
- Available in 16A, 32A & 63A versions
- Single phase and three phase option available
- 18th edition regulations compliant
- MID compliant kWh meter
- Optional pre-paid meter
- Built-in "RCBO" overload and 30mA fault current protection
- IP65 weatherproof ABS enclosure
- Built-in cable terminals
- Devices access flap
- Optional galvanised mounting post
- Easy to install & maintain
- IP Rated & UV stabilised
- Glow wire tested to 650 and 850 deg
- Operational temp -25 to plus 40
- Replacment parts for all units available
- Full Metering solutions Wifi / Sim based
- Montiring software

# Cost Effective solutions to power your distribution needs.



## Marina & Caravan Bollards

Famatel UK is working with MHPS to deliver a range of Bollards to our customers.



### Platinum Leisure Pedestal

A whole host of market leading features. Delivers safe, reliable electricity & water connections along with communication services to Holiday Park, Campsite and Leisure Resorts.

### Sterling Pedestal

Delivers a market leading, low profile design. Built with high quality moulded aluminium extrusions & a robust composite front panel.

### Original Power Pedestal

Installed in Touring Holiday Parks across the globe, and are a fantastic example of our commitment to delivering great value & quality options.

#### Key features

- Made In Britain;
- UKCA;
- Available in 16A, 32A;
- Single phase \* 17th & 18th edition versions;
- Rating of unit as standard IP65 \* Optional MID compliant kWh meter;
- Optional pre-paid meter;
- Optional Smart system Intergration \*Built-in "RCBO" overload and 30mA fault current protection;
- Devices access flap \*Water Tap \*Locable sockets \*Route mount \*Light \*Photo Cell \*Data;





Introducing the

# New Electronic Interlocked Sockets

Speed Pro Camping & Marina

Electrical installations at camping are necessary to provide comfort and safety for travelers around the world. Be during a camping trip or in a parking lot home trailers, have the correct electronic equipment is impressive devices to provide or higher level of security.

Now, the new line of industrial plugs and sockets for camping and marine, includes a range of flush-mounted sockets with **microswitches**, an effective tool in the management of the power plant, as well as adding safety by eliminating the electric arc.



## Micro switch

Control the connection and disconnection status of the sockets from any point of your installation.

The microswitch is activated when the plug is inserted into the socket. It can be used to create an electrical safety interlock or send signals to other devices.



## Speed Pro Camping & Marina



**Cover specially designed for padlock.**



**Microswitch** with NO-NC contact. Available in IP44-54 and IP66-67 versions.

**Microswitch** cable length 50cm.



**New size 64x74cm**



**Maximum padlock diameter 5mm**

Items 23M238L

### Technical features

Operating voltage	200...250V / 380...415V
Insulating voltage	500 V
Frequency C.C.	50/60 Hz
Rated current	16A-32A
Protection degree IE(IP C / EN 60529)	IP54 / IP67
Maximum operating temperature TESTED	+70 °C
Temperature of use according to the norm	-25 °C / +40 °C

### Material

Body material	Polyamide 6 -NYLON
Contact material	Brass - Nickel-plated brass

### Regulation

**IEC 60309-1; IEC 60309-2; EN 61058-1-1:2016, EN IEC 61058-1:2018**

# NEW 18<sup>Th</sup> Edition Caravan Hook-up Units

IP54 RATED



Ref. / Item  
**23M238L**



Ref. / Item  
**NSICAV2SM**

## How the Codes Work

ITEM NAME	DESCRIPTION
NSICAV_	Range Code
_1	Number of Outlets (16A)
NSICAV_32/_	32A Outlets
_/M	With Meter
_/TT	Through Terminal
_/LK	Lockable
_/SM	Side Mounted
_/PH	Photo Cell
_/67	IP67 Rated

## Stake Information

PART CODE	DESCRIPTION
NEWCAVS	18th Edition Stake for "NEWCAV". Excluding Items with "C" reference
CAVSTK1	17th Edition Stake for 1 and 2 Gang
CAVSTK2	17th Edition Stake for 3 and 4 Gang

## SpeedPro Microswitch

AMP	POLES	IP	UNITS PER PACK	VOLTS	PART CODE
16A	3P	44   54	10	240V	23M238L

## Technical Data

AMP	POLES	IP	TYPE A RCBO 30MA DP	MID APPROVED METERS	PART CODE	STAKE NEEDED
16A	3P	54	1x 16A	-	NSICAV1	CAVSTK1
	3P	54	1x 16A	1	NSICAV1/M	CAVSTK1
	3P	54	1x 16A	-	NSICAV1/TT	CAVSTK1
	3P	54	1x 16A	-	NSICAV1/LK	CAVSTK1
	3P	54	1x 16A	-	NSICAV1/M/LK	CAVSTK1
	3P	54	1x 16A	-	NSICAV1/TT/LK	CAVSTK1
	3P	54	1x 16A	-	NSICAV1/M/67	CAVSTK1
	3P	54	1x 16A	1	NSICAV1SM	NEWCAVS
	3P	54	1x 16A	1	NSICAV1/M/SM	NEWCAVS
	3P	54	1x 16A	-	NSICAV1/LK/SM	NEWCAVS

# NEW 18<sup>Th</sup> Edition Caravan Hook-up Units

IP54 RATED



Ref. / Item  
**23M238L**



Ref. / Item  
**NSICAV2SM**

## Technical Data

AMP	POLES	IP	TYPE A RCBO 30MA DP	MID APPROVED METERS	PART CODE	STAKE NEEDED
16A	3P	54	1 x 16A	-	NSICAV1/M/LK/SM	NEWCAVS
	3P	54	1 x 16A	-	NSICAV1/TT/LK/SM	NEWCAVS
	3P	54	2 x 16A	-	NSICAV2	CAVSKT1
	3P	54	2 x 16A	1	NSICAV2/M	CAVSKT1
	3P	54	2 x 16A	-	NSICAV2/67	CAVSKT1
	3P	54	2 x 16A	-	NSICAV2SM	NEWCAVS
	3P	54	2 x 16A	-	NSICAV2/M/SM	NEWCAVS
	3P	54	2 x 16A	-	NSICAV2/LK/SM	NEWCAVS
	3P	54	2 x 16A	-	NSICAV2/M/LK/SM	NEWCAVS
	3P	54	2 x 16A	-	NSICAV2/TT/LK/SM	NEWCAVS
	3P	54	3 x 16A	-	NSICAV3	CAVSTK2
	3P	54	3 x 16A	-	NSICAV3/M	CAVSTK2
	3P	54	3 x 16A	-	NSICAV3/TT	CAVSTK2
	3P	54	3 x 16A	-	NSICAV3/LK	CAVSTK2
	3P	54	3 x 16A	-	NSICAV3/M/LK	CAVSTK2
	3P	54	3 x 16A	-	NSICAV3/67	CAVSTK2
	3P	54	3 x 16A	-	NSICAV3/M/67	CAVSTK2
	3P	54	3 x 16A	3	NSICAV3SM	NEWCAVS
	3P	54	3 x 16A	3	NSICAV3/M/SM	NEWCAVS
	3P	54	3 x 16A	-	NSICAV3/LK/SM	NEWCAVS
	3P	54	3 x 16A	-	NSICAV3/M/LK/SM	NEWCAVS
	3P	54	3 x 16A	-	NSICAV3/TT/LK/SM	NEWCAVS
	3P	54	4 x 16A	-	NSICAV4	CAVSTK2
	3P	54	4 x 16A	-	NSICAV4/M	CAVSTK2
	3P	54	4 x 16A	-	NSICAV4/TT	CAVSTK2
	3P	54	4 x 16A	-	NSICAV4/LK	CAVSTK2
	3P	54	4 x 16A	-	NSICAV4/M/LK	CAVSTK2
	3P	54	4 x 16A	-	NSICAV4/67	CAVSTK2
3P	54	4 x 16A	-	NSICAV4/M/67	CAVSTK2	

Add \*/F= Front Mounted | Add \*/PH= Photo Cell | Add \*/LK = Lockable Sockets | Add \*/IP67 = IP67 Rated

## NEW 18<sup>Th</sup> Edition Caravan Hook-up Units

IP54 RATED



Ref. / Item  
**23M238L**



Ref. / Item  
**NSICAV2SM**

### Technical Data

AMP	POLES	IP	TYPE A RCBO 30MA DP	MID APPROVED METERS	PART CODE	STAKE NEEDED
	3P	54	4 x 16A	-	NSICAV4SM	NEWCAVS
	3P	54	4 x 16A	-	NSICAV4/M/SM	NEWCAVS
	3P	54	4 x 16A	-	NSICAV4/LK/SM	NEWCAVS
	3P	54	4 x 16A	-	NSICAV4/M/LK/SM	NEWCAVS
	3P	54	4 x 16A	-	NSICAV4/TT/LK/SM	NEWCAVS
32A	3P	54	1 x 32A	-	NSICAV1/32	CAVSTK1
	3P	54	2 x 32A	-	NSICAV2/32	CAVSTK1
	3P	54	1 x 32A	1	NSICAV1/32M	CAVSTK1
	3P	54	2 x 32A	2	NSICAV2/32M	CAVSTK1

Add \*/F= Front Mounted | Add \*/PH = Photo Cell | Add \*/LK = Lockable Sockets | Add \*/IP67 = IP67 Rated

### Additional Information


- Made In Britain;
- UKCA;
- Available in 16A, 32A;
- Single phase;
- Side mounted and Front mounted versions;
- 18th edition regulations compliant;
- Rating of unit as standard IP54;
- Optional IP 65 available;
- Optional MID compliant kWh meter;
- Optional pre-paid meter;
- Optional Smart system Integration;
- Built-in "RCBO" overload and 30mA fault current;
- IP65 weatherproof ABS enclosure;
- Devices access flap;
- Optional galvanised mounting post;
- Optional Brass plates available;
- Optional Loop in and out Terminals;
- Easy to install & maintain;
- IP Rated & UV stabilised;
- Glow wire tested to 650 and 850 degrees;
- Operational temp -25 to plus 40;
- Replacement parts for all units available;
- Full Metering solutions Wifi / Sim based;
- Monitoring software;

## Custom Build PDU's

At Famatel UK, we offer a wide range of outdoor PDUs to meet your everyday needs. Our experienced team values efficiency and innovation—reach out to design a custom PDU tailored to your specifications. We provide terminals, built-in switchgear, metering, and more.

### Additional Information

- Offer of GRP & Stainless steel;
- IPX5 Rated Pillars and enclosures;
- Option to Customise with Sockets;
- Internal Brass Plates;
- Incoming supply terminals;
- Pre wired ready to accept supply and demand circuits;
- Internal shield plate;
- Optional internal Adjustable height device plates;
- Customisable to your required RCD/ MCB / RCBO requirements;
- Floor & Roof mounting kits available;
- Switchgear Varients (6A - 2000A) & 30mA, 100mA, 300mA;
- Back Plates included;
- Full Metering solutions Wifi / Sim based;
- Monitoring software;

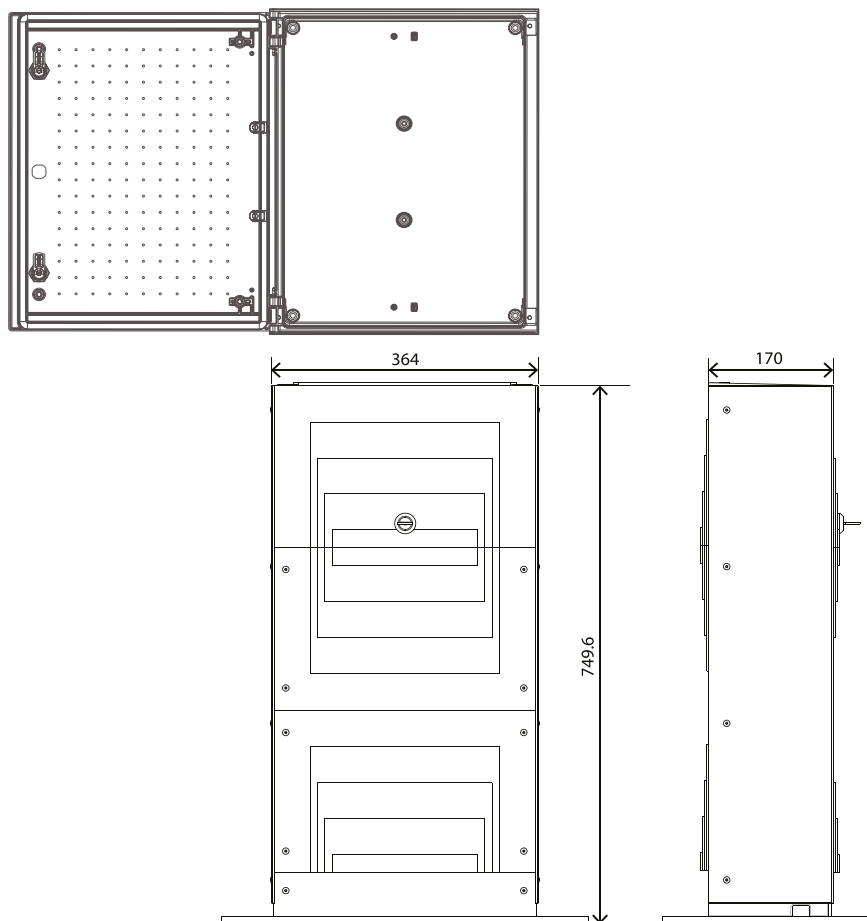

## ePitch



It's a fast and effective way to monitor and control power usage, allowing guests to pay for what they use, track the environmental impact of power consumption, and encourage guests to use less electricity. No monthly or top-up fees — and it doesn't end there...

From simple power monitoring to full switching power control, there's an ePitch solution for every application. For seasonal sites, ePitch M and M+ offer automatic, contract-free 4G LTE and 2G GSM reporting of electricity consumption using a Class 1 MID B & D meter, ensuring you stay in control of your costs. For touring guests, ePitchPro provides a full "Pay As You Use" or prepaid solution, allowing guests to pay only for what they consume and top up directly via your payment gateway on the ePitch Webapp — no account needed.

The easy-to-use cloud platform provides full visibility across your site, and integration with your Park Management System (such as GemaPark, ParcVu, or Anytime Bookings) ensures that your bookings are seamlessly transferred to the ePitch platform.

**ePitch is available in various formats to suit different applications, such as seasonal lodges, fleet units, and touring pitches.**



ePitch - Remote Monitoring

ePitch - Remote Monitoring & Switching

ePitch Pro - Full Tourer PAYG or Pay System

# NEW 18<sup>Th</sup> Edition Caravan Hook-up Units with Smart System Integration



**IP54 RATED**



Ref. / Item  
**ePitch - Remote Monitoring**

## Information

- Made In Britain;
- UKCA;
- Available in 16A, 32A;
- Single phase;
- Side mounted and Front mounted versions;
- 18th edition regulations compliant;
- Rating of unit as standard IP54;
- Optional IP 65 available;
- Smart system Intergration version M ( Metering );
- Smart system intergration version M+ ( Switching and metering);
- Built-in "RCBO" overload and 30mA fault current protection;

- IP65 weatherproof ABS enclosure;
- Devices access flap;
- Optional galvanised mounting post;
- Optional Bras plates available;
- Optional Loop in and out Terminals;
- Easy to install & maintain;
- IP Rated & UV stabilised;
- Glow wire tested to 650 and 850 deg;
- Operational temp -25 to plus 40;
- Replacement parts for all units available;

## Features Included

- ePitchM is ideal for automatically reporting Electricity and Gas consumption for seasonal owners;
- No more reading meters and manual entry;
- Add utility monitoring one at a time;
- No more carrying the electricity costs for all owners for months before being paid;
- Simple, easy to fit in various formats;
- Integration with Park Management Systems (e.g. GEMaParks, Anytime Booking, ParcVu etc.).

## For Seasonals where switching is also required

- ePitch M+ combines all the features of ePitch M with the added ability to switch monitoring on and off;
- Off Season power isolation;
- Maintenance and cleaner mode - customer billing is paused when required.

## For Fleet and Tourer Pitches

- ePitch Pro is the full solution for Pay-As-They-Use or prepaid electricity metering;
- ePitch Platform for full control;
- Guest Webapp - no account required;
- No top up fees;
- Low Balance warnings for guests;
- Integrated with site payment gateway;
- Carbon footprint data included & much more.

FEATURE	EPTICH M	EPITCH M+	EPITCH PRO
Connectivity	Y	Y	Y
4G (LTE) + 2G (GSM) Fall Back	Y	Y	Y
MID B & D Class 1 Monitoring	Y	Y	Y
Remote Switching	N/A	Y	Y
Site Platform	Y	Y	Y
Guest Webapp	Y	Y	Y
Integrations with Park Management System	Y	Y	Y
Payment Integration with existing gateway	N/A	N/A	Y
SIM included	Y	Y	Y
Format Available: DIN (Single and Dual)	Y	Y	Y
Format Available: Cable Mount	Y	Y	Y
EHU integrated	Y	Y	Y
Refund Options – including configurable refund fee	N/A	N/A	Y
No contracts	Y	Y	Y
No Wi-Fi Required	Y	Y	Y
Configurable Pricing	Y	Y	Y
Maintenance Mode	Y	Y	N/A
CO2 Data Provided	Y	Y	Y
Pitch Lighting Control	N/A	N/A	Y
Much More	Y	Y	Y



## NEW 18<sup>th</sup> Edition Caravan Hook-up Units with Smart System Integration

### How the Codes Work

ITEM NAME	DESCRIPTION
NSICAV_	Range Code
_1	Number of Outlets (16A)
_/EM	Emotion Monitoring System
_/EM+	Emotion Switch Control System
_/LK	Lockable Sockets
_/SM	Side Mounted
_/PH	Photo Cell

### Stake Information

PART CODE	DESCRIPTION
NEWCAVS	18th Edition Stake for "NEWCAV". Excluding Items with "C" reference
CAVSTK1	17th Edition Stake for 1 and 2 Gang
CAVSTK2	17th Edition Stake for 3 and 4 Gang

### Technical Data

AMP	POLES	TYPE A RCBO 30MA DP	EMO TECH DEVICE	MID APPROVED METERS	PART CODE	STAKE NEEDED
16A	3P	1 x 16A	1	1	NSICAV1/EM	CAVSTK1
	3P	1 x 16A	1	1	NSICAV1/EM+	CAVSTK1
	3P	2 x 16A	1	1	NSICAV2/EM	CAVSTK1
	3P	2 x 16A	1	1	NSICAV2/EM+	CAVSTK1
	3P	3 x 16A	2	2	NSICAV3/EM	CAVSTK2
	3P	3 x 16A	2	2	NSICAV3/EM+	CAVSTK2
	3P	4 x 16A	2	2	NSICAV4/EM	CAVSTK2
	3P	4 x 16A	2	2	NSICAV4/EM+	CAVSTK2
16A	3P	1 x 16A	1	1	NSICAV1/EM/LK	CAVSTK1
	3P	1 x 16A	1	1	NSICAV1/EM/LK+	CAVSTK1
	3P	2 x 16A	1	1	NSICAV2/EM/LK	CAVSTK1
	3P	2 x 16A	1	1	NSICAV2/EM/LK+	CAVSTK1
	3P	3 x 16A	2	2	NSICAV3/EM/LK	CAVSTK2
	3P	3 x 16A	2	2	NSICAV3/EM/LK+	CAVSTK2
	3P	4 x 16A	2	2	NSICAV4/EM/LK	CAVSTK2
	3P	4 x 16A	2	2	NSICAV4/EM/LK+	CAVSTK2
16A	3P	1 x 16A	1	1	NSICAV1/EM/SM	NEWCAVS
	3P	1 x 16A	1	1	NSICAV1/EM//LK/SM	NEWCAVS
	3P	2 x 16A	1	1	NSICAV2/EM/SM	NEWCAVS
	3P	2 x 16A	1	1	NSICAV2/EM//LK/SM	NEWCAVS
	3P	3 x 16A	2	2	NSICAV3/EM/SM	NEWCAVS
	3P	3 x 16A	2	2	NSICAV3/EM//LK/SM	NEWCAVS
	3P	4 x 16A	2	2	NSICAV4/EM/SM	NEWCAVS
	3P	4 x 16A	2	2	NSICAV4/EM//LK/SM	NEWCAVS

Add \*/EM = Monitoring System | Add /EM+ = Monitoring and switching | Add /PH = Phot Cell | Add /TT = Through Terminal Set

## Accessories



Ref. / Item  
**3923**



Ref. / Item  
**BRSP1**



Ref. / Item  
**23272**



Ref. / Item  
**25056**



Ref. / Item  
**DDS353**



Ref. / Item  
**CPROA**



Ref. / Item  
**WRB**



Ref. / Item  
**RI-D175 MID**

CODE	DESCRIPTION	PRODUCT CODE	PINS	TYPE	IP	AMP	POLES	VOLTAGE	MA
1302S	Replacement panel socket	17th Edition versions	2P+E	Panel Socket	54	16A	-	240v	-
23272	Replacement panel socket	17th Edition versions	2P+E	Panel Socket	54	32A	-	240v	-
25056	Switched sockets	18th Edition Units	2P+E	Panel Socket	54	16A	-	240v	-
25063	Switched sockets	18th Edition Units	2P+E	Panel Socket	54	32A	-	240v	-
DDS353	MID Approved Meter	All Caravan Units	-	Meter	-	45A	SP	240v	-
CPROA-16/2B	RCBO DP	C-Pack	DP	RCBO 30ma	-	16A	DP	240	30ma
CPROA-32/2B	RCBO DP	C-Pack	DP	RCBO 30ma	-	32A	DP	240	30ma
WRB216B-030	RCBO DP	WCED	DP	RCBO 30ma	-	16A	DP	240	30ma
WRB232B-030	RCBO DP	WCED	DP	RCBO 30ma	-	32A	DP	240	30ma
BRSP1	Brass Plates	CAV1/2 & NSICAV1, NISCAV 2	-	-	-	-	-	-	-
BRSP2	Brass Plates	CAV3 / 4 & NSICAV1, NISCAV 2	-	-	-	-	-	-	-
BRSP3	Brass Plates	NEWCAV 1, 2, 3, 4	-	-	-	-	-	-	-
FMEIOTTERN	Loop in & Out Terminals	All units	-	-	-	-	-	-	-
3923	Blank Plates	NEWCAV 1, 2, 3, 4	-	-	-	-	-	-	-

\*SP = Single Pole | DP= Double Pole


■ We offer additional parts like boxes, windows and screws. Please contact for details.

SpeedPRO Panel socket for lock

3P=2P+E

**230V**  
50/60Hz

Amp	Poles	Pack unit	Poles: 3P Hour P: 6h
16	3	10	<b>23238L</b>

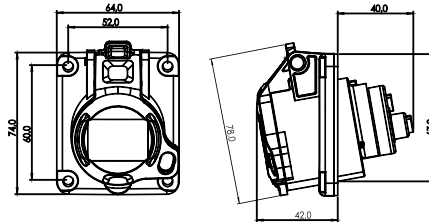

Ref. / Item **23238L** **CE**


- With screw terminals
- Housing material: PA6
- Contacts: Brass
- Weight: 115g
- Flexible cable (mm2): 1+2.5
- Degree of protection: **IP44-54**

SpeedPRO Microswitch panel socket for lock

3P=2P+E

**230V**  
50/60Hz

Amp	Poles	Pack unit	Poles: 3P Hour P: 6h
16	3	10	<b>23M238L</b>

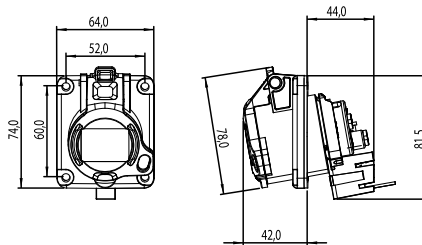

Ref. / Item **23M238L** **CE**


- With screw terminals
- Housing material: PA6
- Contacts: Brass
- Weight: 1140g
- Flexible cable (mm2): 1+2.5
- Degree of protection: **IP44-54**

SpeedPRO Mobile plug for lock

3P=2P+E

**230V**  
50/60Hz

Amp	Poles	Pack unit	Poles: 3P Hour P: 6h
16	3	10	<b>13200L</b>

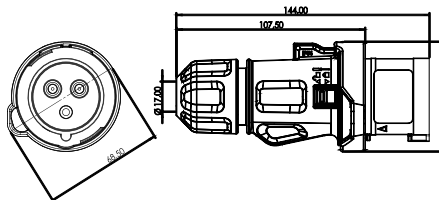

Ref. / Item **13200L** **CE**

- With screw terminals
- Housing material: PA6
- Contacts: Nickelplated
- Weight: 162
- Flexible cable (mm2): 1+2.5
- Degree of protection: **IP44-54**

**Micro switch**

Control the connection and disconnection status of the sockets from any point of your installation.

The microswitch is activated when the plug is inserted into the socket. It can be used to create an electrical safety interlock or send signals to other devices.






SpeedPRO Panel socket 64x74

3P = 2P + E

**230V**  
50/60Hz

Amp	Poles	Pack unit	Poles: 3P Hour P: 6h
16	3	10	<b>23236</b>



Ref. / Item **23236** 



- With screw terminals
- Housing material: PA6
- Contacts: Brass
- Weight: 115g
- Flexible cable (mm2): 1+2,5
- Degree of protection: **IP44-54**

SpeedPRO Panel socket 64x74

3P = 2P + E

**230V**  
50/60Hz

Amp	Poles	Pack unit	Poles: 3P Hour P: 6h
16	3	10	<b>23237</b>



Ref. / Item **23237** 



- With screw terminals
- Housing material: PA6
- Contacts: Brass
- Weight: 135g
- Flexible cable (mm2): 1+2,5
- Degree of protection: **IP66-67**


SpeedPRO Microswitch panel socket 64x74

3P = 2P + E

**230V**  
50/60Hz

Amp	Poles	Pack unit	Poles: 3P Hour P: 6h
16	3	10	<b>23M236</b>



Ref. / Item **23M236** 



- With screw terminals
- Housing material: PA6
- Contacts: Brass
- Weight: 137
- Flexible cable (mm2): 1+2,5
- Degree of protection: **IP44-54**

SpeedPRO Microswitch panel socket 64x74

3P = 2P + E

**230V**  
50/60Hz

Amp	Poles	Pack unit	Poles: 3P Hour P: 6h
16	3	10	<b>23M237</b>





Ref. / Item **23M237** 

- With screw terminals
- Housing material: PA6
- Contacts: Brass
- Weight: 162
- Flexible cable (mm2): 1+2,5
- Degree of protection: **IP66-67**

Dimensions in mm

SpeedPRO Microswitch panel socket 75x85

16	3	10	23M230	
	4	10		23M330
	5	5		23M331
32	3	4	23M233	
	4	4		23M332
	5	3		23M333





Ref. / Item **23M230** **CE**

- With screw terminals
- Housing material: PA6
- Contacts: Brass
- Weight: 115g
- Flexible cable (mm<sup>2</sup>): 1+2,5
- Degree of protection: **IP44-54**

SpeedPRO Microswitch panel socket 75x85

16	3	10	24M230	
	4	10		24M330
	5	6		24M331
32	3	6	24M233	
	4	6		24M332
	5	6		24M333




Ref. / Item **24M230** **CE**

- With screw terminals
- Housing material: PA6
- Contacts: Brass
- Weight: 1140g
- Flexible cable (mm<sup>2</sup>): 1+2,5
- Degree of protection: **IP66-67**

Industrial-domestic IP44


Ref. / Item	<b>13000</b>
<ul style="list-style-type: none"> <li>• Industrial-domestic adaptor with cable extension IP44</li> </ul>	

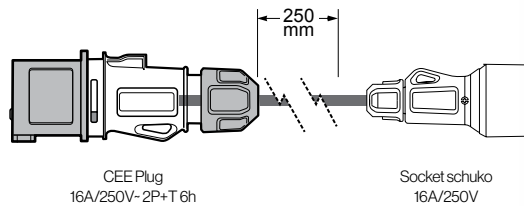

Ref. / Item **13000** **CE**

Industrial-domestic IP44


Ref. / Item	<b>13011</b>
<ul style="list-style-type: none"> <li>• Industrial-domestic adaptor with cable extension IP44</li> </ul>	

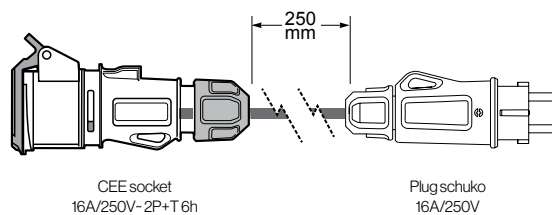


Ref. / Item **13011** **CE**

Dimensions in mm



Domestic-industrial IP20

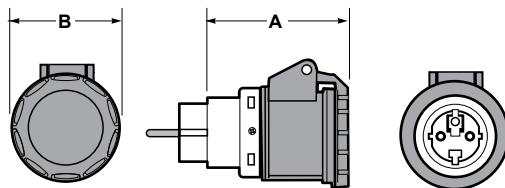
Ref. / Item		<b>13912</b>
	A	B
Dimensions	80	60
Entry	Plug schuko 16A/250V	
Outlet	Socket ind. CEE 16A/250V-2P+T 6h	
Weight (g)	164	



Ref. / Item **13912** 


Industrial-domestic IP20

Ref. / Item	 	<b>13913</b>
	A	B
Dimensions	120	85
Entry	CEE plug 16A/250V-2P+T 6h	
Outlet	Sockets Bipasso 16A/250V	
Weight (g)	164	

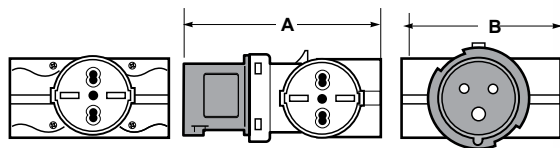


Ref. / Item **13913** 

Industrial socket angled 90° with Schuko socket for caravan IP44


Ref. / Item		<b>13919</b>
	A	B
Dimensions	80	60
Entry	Plug schuko 16A/230V 3P	
Outlet	CEE 16A 2P+T 230V + Schuko 16A 2P+T 230V	
Weight (g)	101	




Ref. / Item **13919** 

 Sistema / System SCHUKO


Adaptor IP20


Ref. / Item		<b>13917</b>	
	A	B	C
Dimensions	56	68	60,5
Entry	CEE plug 16A 3P+N+T 400V		
Outlet	Socket schuko 16A 2P+T 230V		
Weight (g)	152		

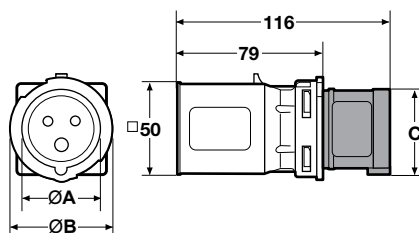

Ref. / Item **13917** 

Adaptor IP54


Ref. / Item		<b>13910</b>	
	A	B	C
Dimensions	43,2 / 3P	56 / 3P	46,5 / 3P
	56 / 5P	68 / 5P	60,5 / 5P
Entry	Clavija CEE / CEE plug 16A 2P+T 230V		
Outlet	Socket schuko 16A 2P+T 230V		
Weight (g)	155		

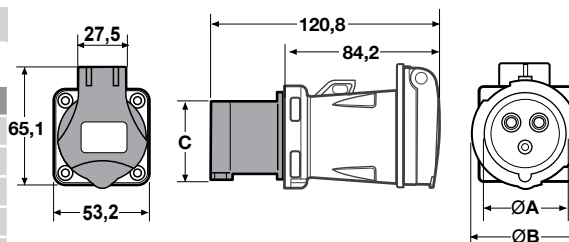


Ref. / Item **13910** 

Dimensions in mm


Adaptor IP54


Ref. / Item		<b>13922</b>		
	<b>A</b>	<b>B</b>	<b>C</b>	
Dimensions	43,2 / 3P	56 / 3P	46,5 / 3P	
	56 / 5P	68 / 5P	60,5 / 5P	
Entry	CEE plug 16A 2P+T 230V			
Outlet	Socket schuko 16A 3P+N+T 400V			
Weight (g)	185			

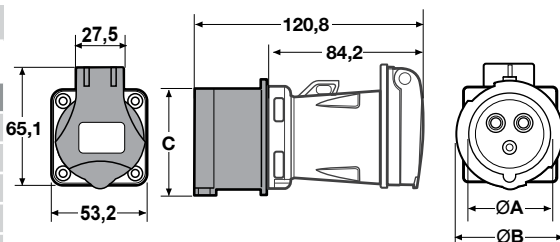

Ref. / Item **13922** **CE**

Adaptor IP20


Ref. / Item		<b>13918</b>		
Entry	CEE plug 3P+N+T 400V			
Outlet	Socket schuko 3x(16A 2P+T 230V)			
Weight (g)	196			

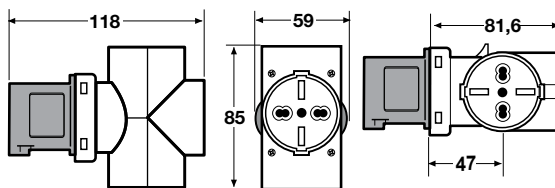

Ref. / Item **13918** **CE**

Flush mounting plug for caravan IP44



Ref. / Item	● <b>13361</b>		
	● <b>13362</b>		
	<b>B</b>	<b>C</b>	<b>D</b>
Dimensions	56	127	59
Entry	Plug 16A/230V 3P		
Outlet			
Weight (g)	164		

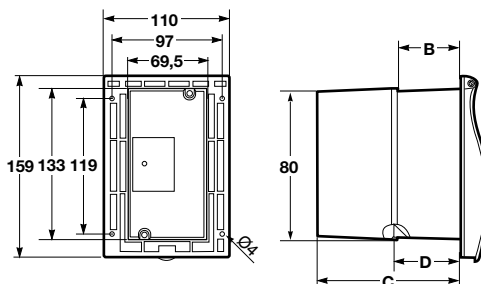

Ref. / Item **13361** **CE**

Flush mounting plug for caravan IP44

Ref. / Item	● <b>13364</b>		
	<b>B</b>	<b>C</b>	<b>D</b>
Dimensions	56	127	59
Entry	Plug 16A/230V 3P		
Outlet	Miniature Circuit Breaker (MCB) 1P+N		
Weight (g)	164		

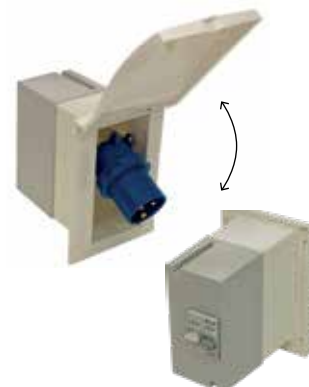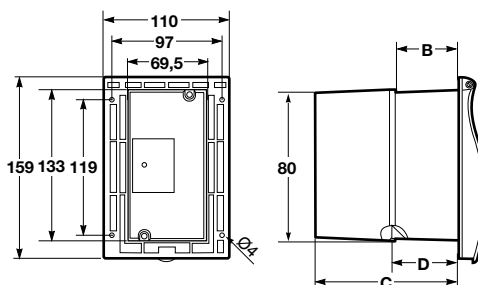

Ref. / Item **13364** **CE**

Ref. / Item	● <b>13365</b>		
	<b>B</b>	<b>C</b>	<b>D</b>
Dimensions	56	127	59
Entry	Plug 16A/230V 3P		
Outlet	Residual Current Device (RCD) 1P+N		
Weight (g)	164		

Dimensions in mm



**Famatel**.uk

**famatel.co.uk**

Unit 36 Buckingham Road,  
Lynx Crescent  
Weston Industrial Estate,  
Weston Super Mare  
BS24 9BG

 ...company/famatel-uk/  
 @famateluk1627  
 @famatel\_uk