


# Square Bollard



User selectable colour temperature via dip switch



## FEATURES



Architectural LED lamp range in modern style, made of shock proof resin material, UV-rays stabilized, rust and corrosion free. Square bollards in different sizes, spike and wall mounted versions available. Supplied with TUV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps. Insulation class II, protection rating IP55.

**NOTE: Fitted as standard:  
10W 3000K 1200 Lm**

3W & 7W versions available on request


Product Code	Description (All mini bollards are fitted with a 10w 3000K 1285 Lm lamp and are in black)	16A 2P+E 240V outlet	16A DP 30mA 240V RCBO	45A MID approved meter	Din rail mounted RID pre pay card meter
SPMINBOL1	17th Edition 1 gang with RCBO	x1	x1	x1	
SPMINBOL2	17th Edition 2 gang with RCBO	x2	x2	x2	
SPMINBOL3	17th Edition 3 gang with RCBO	x3	x3	x3	
SPMINBOL4	17th Edition 4 gang with RCBO	x4	x4	x4	
SPMINBOL1/M	17th Edition 1 gang with RCBO & MID approved meter	x1	x1		
SPMINBOL2/M	17th Edition 2 gang with RCBO & MID approved meter	x2	x2		
SPMINBOL3/M	17th Edition 3 gang with RCBO & MID approved meter	x3	x3		
SPMINBOL4/M	17th Edition 4 gang with RCBO & MID approved meter	x4	x4		
SPMINBOL1/CRD	17th Edition 1 gang with RCBO & card meter	x1	x1	x1	x1
SPMINBOL2/CRD	17th Edition 2 gang with RCBO & card meter	x2	x2	x2	x2
SPMINBOL3/CRD	17th Edition 3 gang with RCBO & card meter	x3	x3	x3	x3
SPMINBOL4/CRD	17th Edition 4 gang with RCBO & card meter	x4	x4	x4	x4
SPMINBOL1/18	18th Edition 1 gang with RCBO	x1	x1	x1	
SPMINBOL2/18	18th Edition 2 gang with RCBO	x2	x2	x2	
SPMINBOL1/18/M	18th Edition 1 gang with RCBO & MID approved meter	x1	x1		
SPMINBOL2/18/M	18th Edition 2 gang with RCBO & MID approved meter	x2	x2		

## MOULDED COLOURS

Black
  Grey
  White
 Standard units are in black. If you require units in grey or white please add /G or /W to the product codes above

## Parts

Product ID	Description
FMEIOTerm	35mm in/out terminals
1302S	16A 3P 240V IP44 replacement socket
FMEDDS353	KWh meter 40A
23272	32A 3P 240V IP44 socket
3214B6-I	16A 3P 240V IP44 18th edition socket
SOFT	Software for card readers (enables charging of cards for pre payment meter)
CARDR	Card reader for us with software
CARD	Cards for reader & software
FMELOAD	Loading station for meters
SDM320Y-RF	45A MID approved card meter
3923	Replacement blank plate 18th edition
WMS2100	100A DP mains switch
WER16B-030	16A DP B Type RCBO 240V
WER32B-030	32A DP B Type RCBO 240V
LAMPS36500	GX53 LED 3W 350 Lm 6500K
LAMPS34000	GX53 LED 3W 350 Lm 4000K
LAMPS33000	GX53 LED 3W 350 Lm 3000K

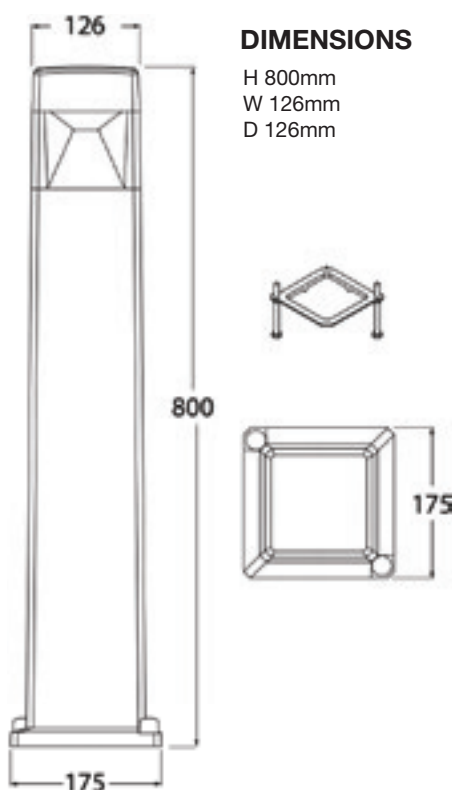

### DIMENSIONS

H 800mm  
W 126mm  
D 126mm



100-240V		*ADD . SUFFIX	
3W	415 Lm	6500K	G1K.MS
	395 Lm	4000K	G1K.ML
	380 Lm	3000K	G1K.MR
7W	975 Lm	6500K	C1K.MS
	975 Lm	4000K	C1K.ML
	975 Lm	3000K	C1K.MR
10W	1410 Lm	6500K	D1K.MS
	1350 Lm	4000K	D1K.ML
	1285 Lm	3000K	D1K.MR

Standard configuration.  
Other options available  
on request



WEE/MM8422AA